

**World Leader in Sophisticated Packaging Systems**



AS Automatic Uniform Sidedrive

**series overview**

The BestPack® AS series are standard operator-free, carton-sealing machines designed to meet the needs of uniform in-line carton closure applications.

The units are two belt driven (two side belts driven), driven by three electric 110V UL approved motors. The AS series carton sealers are designed with a four column support structure. These units use 60 PSI and 4-5 CFM of air.

All systems incorporate our exclusive pop out pressure sensitive "High Speed" tape heads with patented tab adjustment.

**major features**

- *In-line Carton Closure*
- *Adjustable Bed Height from 19.5" to 30.75"*
- *Reduced Cycle Time*
- *Rugged Construction*
- *Operator Free Design*
- *Cost Effective*
- *Height/Width Adjustments on either side of Machine*
- *Box Top Compression Unit*
- *Tape Roll Lengths: 1000 yd., 1500 yd., 2000 yd.*
- *Heavy Duty Frame*
- *UL Approved Electrical Parts*
- *Designed for Uniform Carton Applications*
- *Capable of Interchanging 2" or 3" Tape Heads*
- *Electrical on/off box can be mounted on either side of machine*


**standard features**

- *Exclusive Pop-out pressure sensitive "high speed" tape head with patented tab adjustment and noise reduction arm*
- *Exclusive Automatic Flap-Fold*
- *Adjustable Bed Height*
- *Upper Side Compression*
- *Operation Manual*

**World Leader in Sophisticated Packaging Systems**

**optional features**

- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft./mm.)
- Compatible Indexer: ARX model
- Interlock Safety Gates

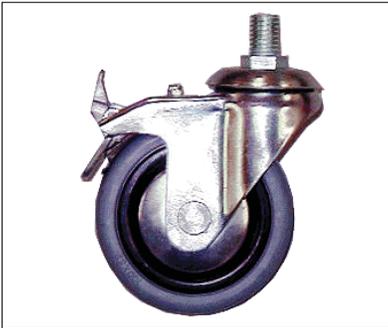

**Locking Castors**



**ARX Indexer**

**machine & carton specifications**

- Power Requirements: 110 Volts 60 Hz
- 45 - 60 PSI, 4 - 5 CFM
- Speed: Up to 35 cartons/minute
- Tape Head: Standard: 2"; Available: 3"

**series comparison table**

| Model                   | Machine Dimensions           | Carton Range                              | Cartons/Min. | Weight (lbs.) |
|-------------------------|------------------------------|---|--------------|---------------|
| AS 12-2<br>2" tape head | (70.75") x (26.5") x (68.0") | (6.0"-27.5) x (6.0"-14.6") x (4.5"-20.0") | Up to 35     | 500           |
| AS 12-3<br>3" tape head | (70.75") x (26.5") x (68.0") | (6.0"-27.5) x (7.5"-14.6") x (4.5"-20.0") | Up to 35     | 500           |
| AS 22-2<br>2" tape head | (78.0") x (33.8") x (73.0")  | (6.0"-27.5) x (6.0"-21.0") x (4.5"-20.0") | Up to 35     | 585           |
| AS 22-3<br>3" tape head | (78.0") x (33.8") x (73.0")  | (6.0"-27.5) x (7.5"-21.0") x (4.5"-20.0") | Up to 35     | 585           |

\* All specifications capable of customization or subject to change without notice