

HAWKTM V-6

The most affordable, compact and simple vertical form, fill and seal machine available on the market.

**Less Than
4 Feet Tall**

- Stainless steel construction allows for packaging pet food, frozen food, vegetables, snacks, granular products, cereals and other food related applications.
- Easily interfaced with automatic filling equipment from partners like; All Fill, Yamato, and Weigh Right.



STANDARD HAWK V6 FEATURES

- Photo Eye for Bag Registration
- Servo Motor Driven
- One Film Reel Holder
- Powered Film Unwind System
- Dual Digital Temperature Control
- Encoder Bag Length Control
- Retractable Belt Film Pull Mechanism
- Manual Edge Guide System
- Lexan Safety Guard with Safety Switch
- PLC Based
- Menu Driven Parameter Adjustment
- Automatic Pneumatic Air Purge
- Programmable Memory

BENEFITS

- Easy to Operate
- Easy to Maintain
- Quick bag size change over
- Best value per square foot in the industry



PACKAGING

888-922-1622

WWW.IPACK.COM

HAWK V-6™



HAWK V6 OPTIONS


- Bag Deflator
- Additional Forming Assemblies
 - Hot Stamp Imprinter
 - Thermal Imprinter
 - Emboss Date Coder
 - Exit Conveyor
 - Gas Flush Tube and Connections (does not include flow regulator and in-put products)
 - Heated Hole Punch
 - Heated or Cooled Control Panel
 - Air Cooling Seal Jaws
 - Nema 4 Construction Available
 - Easy Tear Perforation

HAWK FILM PERFORMANCE CRITERIA

- COF
- Seal Strength
- Wide Seal Range Available for Enhanced Speed
- Tear Valves
- Easy Opening
- Peelable
- Anti-Static
- Anti-Skid
- Anti Corrosive

BARRIER PROPERTIES

- MVTR- Moisture Specifications
- O2TR- Oxygen Specifications
- Grease Barriers
- Water Barriers

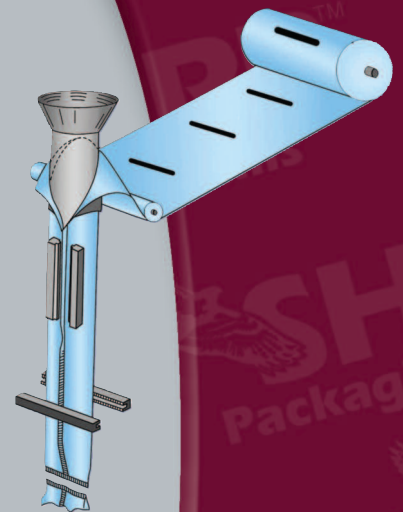

TECHNICAL SPECIFICATIONS

Speed	Up to 50 Bags per Minute
Bag Widths	1.5 to 6.0 inches
Bag Lengths	Up to 8 inches Single Stroke
Bag Materials	Laminated & Polyethylene
Electrical	220 VAC 60Hz, 15 AMPS single phase
Air	80 PSI, 12 CFM



PACKAGING

888-922-1622

WWW.IPACK.COM