



tesa® Double-Sided Foam Tapes

The Strongest Tapes on the Market Just Got Softer

tesa's tried-and-true double-sided tapes have long been the products of choice for bonding and mounting applications worldwide. Now this distinctive product line becomes even more robust with the introduction of a new family of foam tapes!

Designed specifically for permanent bonding and mounting applications, tesa's new foam-backed tapes provide unique benefits in addition to those afforded by standard double-sided tapes. These benefits include:

- Conformability to expansions and contractions in bonded material due to changes in temperature
- Superior bonding power due to enhanced adhesive "wetting" (coverage) of the mating surfaces
- Exceptional shock resistance for occasional impacts

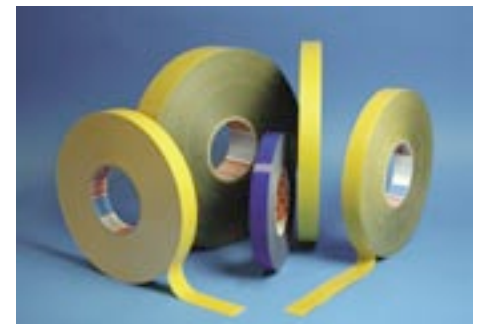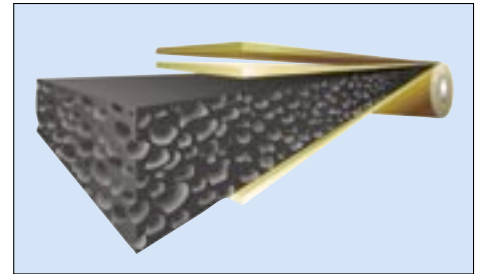

A choice of thicknesses and adhesives, combined with an advanced, closed-cell foam composition, provide a variety of solutions for constructive and general permanent bonding applications.

Constructive Bonding

Extremely Demanding Environments

- tesa® 62932
- tesa® 62934
- tesa® 62936 (*Coming Soon!*)
- tesa® 62872
- tesa® 62875

- Suitable for outdoor elements
- Resistant to ultraviolet (UV) light
- Resistant to humidity
- Exceptional shear and shock resistance
- Complete adhesive coverage on the mating surface guarantees a permanent bond
- Enhanced foam formulation for superior internal strength

General Bonding

Controlled Environments

- tesa® 4952
- tesa® 4957
- tesa® 64958

- Exceptional performance for indoor bonding applications
- Great shear and shock resistance
- Complete adhesive coverage on the mating surface ensures a permanent bond

tesa® Double-Sided Foam Tapes





Product Number	Thickness (mils)	Adhesive System	Backing Color		Liner Options			
			Black Foam	White Foam	Brown Glassine Paper (71 µm) ³	White PE ¹ Coated Paper (122 µm)	Blue Filmic PE Liner (100 µm)	Red Filmic MOPP ² Liner (120 µm)
tesa® 62932	20	modified acrylic	x		PV0	PV14		
tesa® 62932	20	modified acrylic		x	PV0		PV15	
tesa® 62934	32	modified acrylic	x		PV0	PV14		PV10
tesa® 62936	64	modified acrylic	x		PV0	PV14		PV10
tesa® 4952	46	modified acrylic		x	PV0			
tesa® 4957	44	modified acrylic	x	x	PV0		PV15	
tesa® 64958	40	synthetic rubber		x	PV0			
tesa® 62872	20	pure acrylic	x		PV0			
tesa® 62875	36	pure acrylic	x		PV0			

¹PE - Polyethylene

²MOPP - Mono-oriented Polypropylene

³µm - microns

Features and Technical Details of Available Liners

Product Features	Liner Thickness	Weight	Color
 <p>Glassine Paper Liner + Cost efficient + Low compression due to hard paper core - Limited humidity resistance</p>	2.8 mils	49 lbs/ream	Mustard Yellow
 <p>PP (Polypropylene) Film Liner + Very narrow thickness tolerance + Translucent for visual inspection + Low electrical charge - High elongation</p>	3.2 mils	44 lbs/ream	Tango Red, Translucent
 <p>PE (Polyethylene) Coated Paper Liner + Excellent humidity resistance + PE layer against paper fiber emission - Higher cost</p>	4.8 mils	74 lbs/ream	White, Printed Logo
 <p>PE (Polyethylene) Film Liner + Very narrow thickness tolerance + Low electrical charge - High elongation</p>	3.2 mils	56 lbs/ream	Blue

UNITED STATES & CANADA

tesa tape, inc.

5825 Carnegie Boulevard
 Charlotte, NC 28209
 Phone: 704 554 0707
 Toll Free: 800 426 2181
 Fax: 800 852 8831
 Email: customer-care@tesatape.com
 Website: www.tesatape.com

MEXICO

Technical Tape México S.A. de C.V.

Av. Santa Fe No. 170
 German Centre P 6-3-3Col.
 Lomas de Santa Fe
 Mexico D.F. C.P. 01210
 Phone: +52 (55) 5292 6978
 Fax: +52 (55) 5292 6977

© tesa tape, inc. 04-2008