

World Leader in Sophisticated Packaging Systems**MTLW** Manual Top Drive Low Profile**series overview**

The BestPack® MTLW Series are Semi-Automatic Adjustable Tape Carton Sealers engineered for economical, effective operator-fed closure applications. The MTLW's air-driven brushes tuck the leading and trailing tabs that hang over the bottom of the carton. These brushes facilitate top sealing of cartons from a min. height of 1/2" high, 3" lower than the MT's min. height of 3.5".

All systems incorporate our exclusive pop out pressure sensitive "High Speed" tape heads with patented tab adjustment.

major features

- **Designed for Uniform Applications**
- **Four Belts - 2 Top and 2 Bottom Belts**
- **Air-driven brushes that allow for low taping**
- **Low Profile**
- **Adjustable Bed Height from 24.5" to 30.75"**
- **Extra 4" Carton Height Adjustment Available on Upper Assembly**
- **Height Adjustment on either side of machine**
- **Box Top Compression Unit**
- **Tape Roll Lengths: 1000 yd., 1500 yd., 2000 yd.**
- **Heavy Duty Frame**
- **UL Approved Electrical Parts**
- **Rugged Construction**
- **Guide Rail Centering Mechanism**
- **Capable of Interchanging 2" or 3" Tape Heads**
- **Upper Side Compression Rollers**
- **Electrical Box Convertible - Left or Right Side**

standard features

- **Exclusive Pop-out pressure sensitive "high speed" tape head with patented tab adjustment and noise reduction arm**
- **Adjustable Bed Height from 24.5" to 30.00"**
- **Operation Manual**

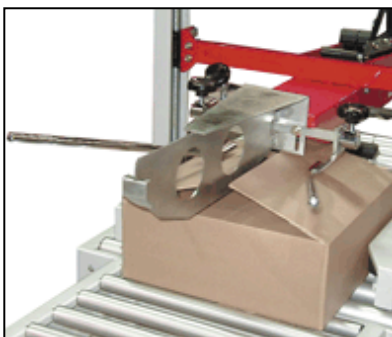
**PACKAGING**

888-922-1622

WWW.IPACK.COM

World Leader in Sophisticated Packaging Systems**optional features**

- Spare Parts Kit
- High Speed Motor Upgrade (Up to 125 ft./mm.)
- Motorized Height Adjustment
- Interlock Safety Gates
- Low or No Taper Sensor
- Stainless steel

**Locking Castors****3 Flap Folder****Infeed/Exit Conveyor w/ Stabilizer****machine & carton specifications**

- Power Requirements: 110 Volts 60 Hz
- Air Requirements: 60-75 PSI, 2-3 CFM
- Speed: Up to 40 cartons/minute
- Tape Head: Standard: 2"; Available: 3"
- Stainless Steel

series comparison table

Model	Machine Dimensions	Carton Range	Cartons/Min.	Weight (lbs.)
MTLW 22-2/32-2 2" or 3" tape head	(46.1) x (33.5") x (55.5")	(6.0"-U) x (8.2"-19.7") x (0.5"-20.3")	Up to 40	388
MTLW 32-3/ 33-3 2" or 3" tape head	(46.1") x (43.0") x (55.5")	(6.0"-U) x (8.2"-30.0") x (0.5"-20.3")	Up to 40	416

* All specifications capable of customization or subject to change without notice

**PACKAGING****888-922-1622****WWW.IPACK.COM**